



BARE BATTEN ZBB

20 Watts / 2500 Lumens / 85+ CRI

40 Watts / 5500 Lumens / 85+ CRI

Surface Mounted linear LED batten manufactured using Japanese based die's featuring 150lm/w technology. Powdercoated body with acrylic diffuser for smooth uniform light distribution. internally mounted 4mm Terminal block for ease of installation.

Input Voltage 240V

Lamp Type LED

IP Rating IP20

Weight 1300g

ZBB224

System Power 20.0W

LED Power 18W

ZBB444

System Power 44.9W

LED Power 40W

ZBB Technical Specifications

	ZBB224	ZBB444
COB Lumen Output	2500 lm	5500 lm
Total Luminous Flux	2194 lm	4906 lm
Efficacy	110 lm/W	109 lm/W
Lifetime	50,000hrs (L70)	

Power Factor > 0.96


Input Voltage 220V - 240V AC 50/60 Hz

Protection Thermal and Short Circuit


Dimming DALI* 1-10v* Available on request

Emergency Systems Optional 4 hour Battery Backup available


ZBB Dimensions



ZBB Trim Colours



ZBB Light Distribution

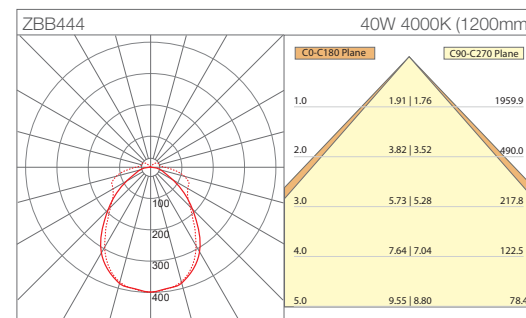

ZBB Order Code

ZBB444



TREND
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au