




# MAXILED XDL55

55 Watts / 7350 Lumens / 90+ CRI




55W Recessed adjustable LED downlight. Available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. Large pressure cast aluminium heatsink provides effective thermal management ensuring high output and long lifespan. Supplied with remote driver.

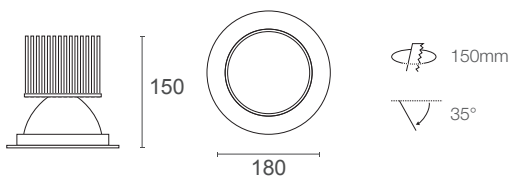

System Power	58.8W	Cut-Out	150mm
LED Power	55W	Tilt-Angle	35°
IP Rating	IP20	Weight	910g

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	7050 lm	7200 lm	7350 lm	7500 lm	VIVID	5900 lm	6050 lm	6200 lm
Total Luminous Flux	5063 lm	5170 lm	5278 lm	5386 lm		4237 lm	4344 lm	4452 lm
Efficacy	89.76 lm/W 4000K Wide Beam			Lifetime	50,000hrs (L80)			
Dimming	Optional: Leading + Trailing Edge    Dali							
Input Voltage	100V - 240V AC 50/60 Hz			Protection	Thermal and Short Circuit		Power Factor	> 0.95

### Accessories

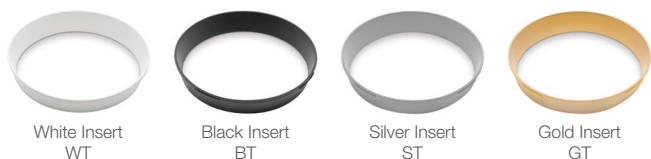

Product	CCT	Light Source	Beam Angle	Trim Colour	Insert Colour	Driver
XDL55	2700K	2.7	90+ CRI	Wide Beam	White	Black Insert
	3000K	3	VIVID*	Medium Beam	Black	White Insert*
	4000K	4			Silver	Silver Insert*
	5000K	5				Gold Insert*
XDL55	3		WB	W	BT	none
						Leading + Trailing*
						DALI*

XDL553-WB-W-BT

\* Optional



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au