




## MIDILED XDM26

26 Watts / 3170 Lumens / 90+ CRI

Recessed adjustable LED downlight featuring a single 26 watt Japanese made COB. Available in 3000K, 4000K and 5000K colour temperature options with a high colour rendering index (CRI) of 90+ and high lumen outputs of 3035Lm (3000K), 3170Lm (4000K) and 3205Lm (5000K). CAD designed vacuum metalised reflector produces uniform light distribution and a luminaire efficacy of 78.5 lm/W. Sealed face with silicone gasket provides increased ingress protection and anodized black heatsink provides effective thermal management ensuring continued high lumen output and long lifespan.

### XDM26 Dimensions

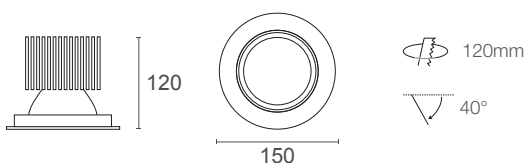

Input Voltage 240V

IP Rating IP44

System Power 26.4W

Cut-Out 120mm


LED Power 26W

Tilt-Angle 40°

Lamp Type LED

Weight 950g


### XDM26 Trim Colours



### XDM26 Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	3035 lm	3170 lm	3205 lm
Total Luminous Flux	1954 WB	2041 WB	2063 WB
Efficacy	78.5 lm/W Wide Beam		
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI* 1-10v* Available on request		

### XDM26 Order Code

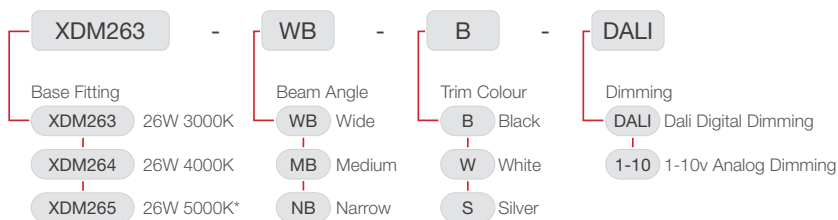

\* Special Order



**TREND**  
LIGHT BY SOLID STATE

288 Coward Street, Mascot, NSW, 2020  
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au