




MIDILED XMB126


26 Watts / 2450 Lumens / 90+ CRI

Recessed LED downlight consisting of a single 26W Japanese made LED with wide beam angle. Sealed face with silicone gasket for added protection. High Colour rendering index (CRI) of 90+ and high lumen outputs of 2300Lm (3000K), 2450Lm (4000K) and 2600Lm (5000K). Anodized black heatsink for effective thermal management ensuring high output and long lifespan.

XMB126 Dimensions

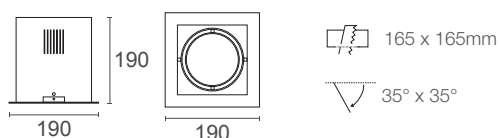

XMB126 Trim Colours

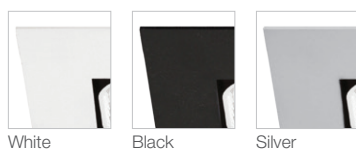


Input Voltage	240V	IP Rating	IP20
System Power	26.4W	Cut-Out	165x165mm
LED Power	26W	Tilt-Angle	35° x 35°
Lamp Type	LED	Weight	2200g

XMB126 Technical Specifications

	3000K	4000K	5000K
COB Lumen Output	3035 lm	3170 lm	3205 lm
Total Luminous Flux	2300 WB	2450 WB	2600 WB
Efficacy	92.8 lm/W Wide Beam		
Lifetime	50,000hrs (L70)		
Power Factor	> 0.95		
Input Voltage	100V - 240V AC 50/60 Hz		
Protection	Thermal and Short Circuit		
Dimming	DALI* 1-10v* Available on request		

XMB126 Order Code

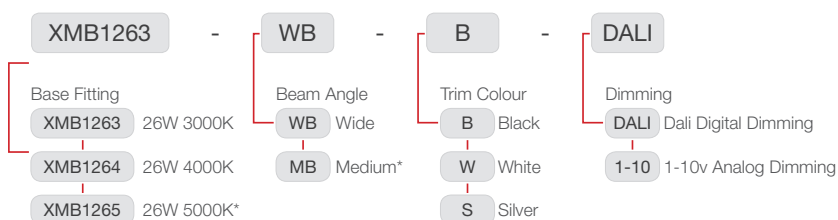

* Special Order



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au