




MINILED XDRL10

10.5 Watts / 1390 Lumens / 90+ CRI



10 Watt low glare LED downlight featuring a single COB LED design available in 2700K, 3000K, 4000K and 5000K colour temperature options in 90+ CRI or 2700K, 3000K and 4000K VIVID options. The Miniled range is supplied with remote driver.

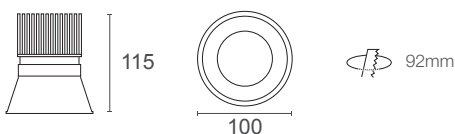

System Power	11.7W	Cut-Out	92mm
LED Power	10.5W	Weight	245g
IP Rating	IP65		

	2700K	3000K	4000K	5000K	VIVID	2700K	3000K	4000K
COB Lumen Output	1300 lm	1335 lm	1390 lm	1410 lm	VIVID	1080 lm	1120 lm	1150 lm
Total Luminous Flux	981 lm	1008 lm	1043 lm	1059 lm		807 lm	839 lm	862 lm

Efficacy	89.14 lm/W 4000K Wide Beam	Lifetime	50,000hrs (L80)
Dimming	Leading + Trailing Edge	Optional: Dali	1-10v
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

Product	CCT	Light Source	Beam Angle	Trim Colour	Driver
XDRL10	2700K 2.7	90+ CRI	Wide Beam WB	White W	Leading + Trailing
	3000K 3	VIVID* V	Medium Beam MB	Black B	DALI*
	4000K 4		Narrow Beam NB	Silver S	1-10v*
	5000K 5				
XDRL10	3		NB	W	

XDRL103-NB-W

* Optional



TREND
LIGHT BY SOLID STATE

Level 3, 290-292 Coward Street, Mascot, NSW, 2020
Ph: (02) 9669 8888 Fax: (02) 9669 8899 Email: sales@trendlighting.com.au