


# SURFACE LED XSF25

25 Watts / 3325 Lumens / 90+ CRI




Surface mounted LED with integral driver. Manufactured with a single 25W LED with a high CRI of 90+ and high COB lumen outputs of 3045 lm (3000K) and 3325 lm (4000K). Front collimator with 20° to 70° adjustable beam angle provides smooth even light distribution while allowing for easy and accurate light control. Adjustable design with 90° tilt and 350° rotation allowing for installation in a variety of lighting applications.

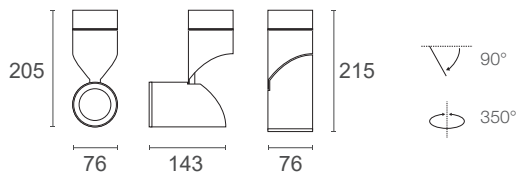

System Power	28.9W	Tilt-Angle	90°
LED Power	25W	Rotation	350°
IP Rating	IP20	Weight	1085g

	3000K	4000K
COB Lumen Output	3045 lm	3325 lm
Total Luminous Flux	2070 lm	2145 lm

Efficacy	74.2 lm/W 4000K	Lifetime	50,000hrs (L80)
Input Voltage	100V - 240V AC 50/60 Hz	Protection	Thermal and Short Circuit
		Power Factor	> 0.95

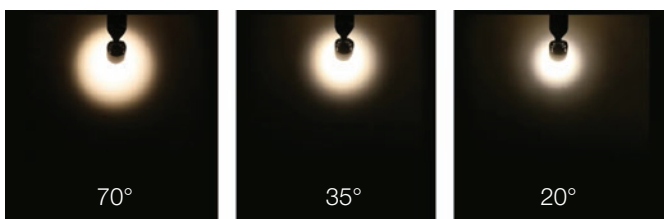

Adjustable focus lens design allows for beam angle adjustments from 20° to 70°



Rotatable front ring adjusts beam angles

Product	CCT	Light Source	Beam Angle	Trim Colour
XSF25	3000K <b>3</b> 4000K <b>4</b>	90+ CRI	Adjustable	White <b>W</b> Black <b>B</b>
XSF25	<b>3</b>			<b>W</b>

XSF253-W