



Scan to explore  
XTO10 online

# Track Spot XTO10

10W Compact Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories*	Driver
XTO10	3 (3000K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	BD (Barn Door)	ND (Non-dimmable) DALI (DALI)
	4 (4000K)		MB (Medium)	B (Black)	CL (Cross Louvre) ER (Eye Snoot) HL (Honeycomb Lens) SR (Snoot) WR (Wallwash Ring)	

Order Code **XTO104-MB-B-ND**

\* Optional accessories



## Product Features

- Track mounted compact LED spotlight distinctively known for its wide range of configurable accessories
- Powder coated body with anodised heatsink provides optimal thermal management ensuring high output and long lifespan
- Adjustable design with 350° rotation and 100° tilt angle
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a 3-circuit track adapter and an integral driver

## Product Attributes




To configure this track light please visit  
[trendlighting.com.au/product/track-spot-XTO10](http://trendlighting.com.au/product/track-spot-XTO10)

## Physical Characteristics

Trim Colour	White   Black
Tilt Angle	100°
Rotation	350°
Dimensions	Ø60 x 136 (H) mm
Weight	523 g

## Dimensions (mm)

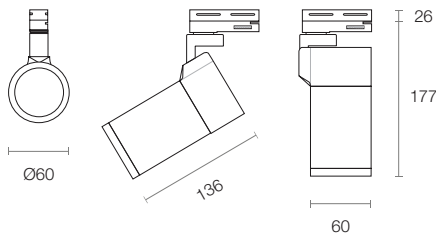

## Technical Characteristics

Based on XTO104-MB-B-ND

LED Power	10W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1047 lm
Efficacy	89.49 lm/W
Colour Temperature	3000K   4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow   Medium
System Power	11.7W Typical
Driver Model	Trend 150415-250 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	30-42V DC 250mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable   DALI

## General Characteristics

Category	Track Systems (Track Light)
Family	Track Spot
Surface	Ceiling
Mounting	Track Mounted
Ingress Protection	IP20



Scan to explore  
XTO10 online

# Track Spot XTO10

10W Compact Track Spot

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories*	Driver
<b>XTO10</b>	3 (3000K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	BD (Barn Door)	<b>ND (Non-dimmable)</b> DALI (DALI)
	4 (4000K)		MB (Medium)	B (Black)	CL (Cross Louvre) ER (Eye Snoot) HL (Honeycomb Lens) SR (Snoot) WR (Wallwash Ring)	

Order Code **XTO104-MB-B-ND**

\* Optional accessories

To configure this track light please visit  
[trendlighting.com.au/product/track-spot-XTO10](http://trendlighting.com.au/product/track-spot-XTO10)

## Trim Colour



W  
White Trim



B  
Black Trim


## Accessories \*



BD  
Barn Door



CL  
Cross Louvre



ER  
Eye Snoot



HL  
Honeycomb Lens




SR  
Snoot




WR  
Wallwash Ring


## Compatible 3 Circuit Track Systems




**TRA3C**  
3 Circuit Track  
Dimensions 33 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver




**TRA3C-DALI**  
3 Circuit DALI Track  
Dimensions 33 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver




**TRA3CR**  
3 Circuit Recessed Track  
Dimensions 56.2 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver



**TRA3CR-DALI**  
3 Circuit Recessed DALI Track  
Dimensions 56.2 x 35 mm  
Max. Length 3000 mm  
White | Black | Silver



**TRA3C-SA**  
3 Circuit Surface Mounted Monopoint  
Dimensions Ø110 x 35 mm  
White | Black



**TRA3C-DALI-SA**  
3 Circuit Surface Mounted DALI Monopoint  
Dimensions Ø143 x 35 mm  
White | Black