



Scan to explore
XSB10 online

Surface XSB10

10W Surface Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XSB10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	TE (Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)		
	4 (4000K)				
	5 (5000K)				

Order Code **XSB104-WB-B-TE**



To configure this downlight, please visit
trendlighting.com.au/product/surface-XSB10

Product Features

- Surface mounted premium LED spotlight designed to make an architectural statement and a practical solution for highlighting architectural features
- Built from an aluminium powder coated body, featuring a high efficiency collimating lens for smooth and even light distribution
- CRI 90+ in 2700K, 3000K, 3500K and 4000K and 5000K CCT options; CRI 97+ and CRI 93+ VIVID available in 2700K, 3000K, and 4000K CCT options


Product Attributes



Physical Characteristics

Trim Colour	White Black
Tilt Angle	90°
Rotation	350°
Dimensions	Ø80 x 155 (H) mm

Dimensions (mm)

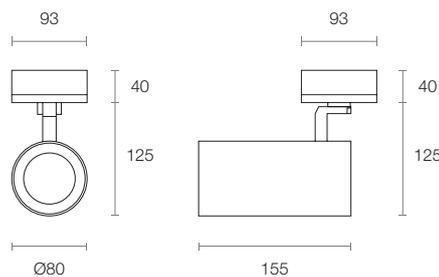

Technical Characteristics

Based on XSB104-WB-B-TE

LED Power	10W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1008 lm
Efficacy	85.42 lm/W
Colour Temperature	2700K 3000K 3500K 4000K 5000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide

System Power	11.8W Typical
Driver Model	Trend 150071-250 (T/E)
Input	220-240V AC 50/60 Hz
Output	30-42V DC 250mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Trailing Edge DALI

General Characteristics

Category	Downlights
Family	Surface
Surface	Ceiling
Mounting	Surface Mounted
Ingress Protection	IP20



Scan to explore
XSB10 online

Surface XSB10

10W Surface Mounted Spotlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XSB10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	TE (Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)		
	4 (4000K)				
	5 (5000K)				

Order Code **XSB104-WB-B-TE**

To configure this downlight, please visit
trendlighting.com.au/product/surface-XSB10

Trim Colour



W
White Trim



B
Black Trim