



Scan to explore
XFS40 online

Maxiled XFS40

36W Recessed Adjustable Rectangular Shop Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XFS40	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	ND (Non-dimmable)
	4 (4000K)			B (Black)	DALI (DALI)

Order Code **XFS404-WB-W-ND**



Product Features

- Recessed adjustable LED rectangular shop light
- Features 65° drop out tilt design for versatile lighting applications
- Black anodised aluminium heatsink provides effective thermal management ensuring high light output and long lifespan
- CRI 90+ available in 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes




To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XFS40

Physical Characteristics

Trim Colour	White Black
Tilt Angle	65°
Dimensions (LxWxH)	230 x 140 x 190 mm
Spring Height	30 mm
Cutout	Rectangular 215 x 125 mm
Weight	1525 g

Dimensions (mm)

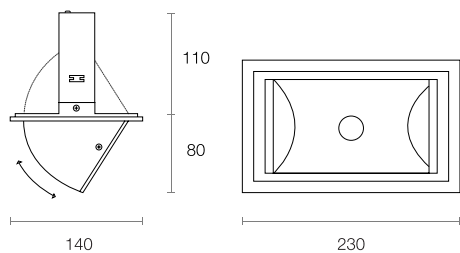

Technical Characteristics

Based on XFS404-WB-W-ND

LED Power	36W
LED Type	COB
Lumen Output	4760 lm
Luminous Flux	3461 lm
Efficacy	90.84 lm/W
Colour Temperature	3000K 4000K
Colour Technology	CRI 90+
Colour Deviation	SDCM ≤ 2
Lifetime	50,000 hours (L70)
Beam Angle	Wide

System Power	38.1W Typical
Driver Model	Trend 150027-1000 (Non-dim)
Input	220-240V AC 50/60 Hz
Output	30-42V DC 1000mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable DALI

General Characteristics

Category	Downlights
Family	Maxiled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	Non-IC
Ingress Protection	IP20



Scan to explore
XFS40 online

Maxiled XFS40

36W Recessed Adjustable Rectangular Shop Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XFS40	3 (3000K)	(CRI 90+ Standard)	WB (Wide)	W (White)	ND (Non-dimmable)
	4 (4000K)			B (Black)	DALI (DALI)

Order Code **XFS404-WB-W-ND**

To configure this downlight, please visit
trendlighting.com.au/product/maxiled-XFS40

Trim Colour



W
White Trim



B
Black Trim