



Scan to explore
XDF10 online

Miniled XDF10

10W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDF10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDF104-WB-W-LT**




To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDF10

Physical Characteristics

Trim Colour	White Black Silver
Dimensions	Ø113 x 85 (H) mm
Spring Height	15 mm
Cutout	Circular 76-92 mm
Weight	450 g

Dimensions (mm)

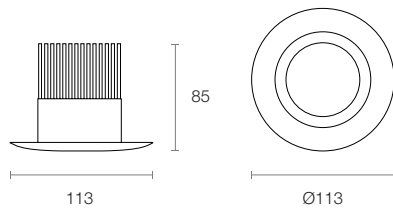

Product Features

- Recessed IP65 rated LED downlight with exceptional light output and quality
- Manufactured with an aluminium body and powder coat finish
- A wide choice of power options and sizes available ([XDF15](#), [XDF25](#), [XDF35](#) and [XDF55](#))
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes



Technical Characteristics


Based on XDF104-WB-W-LT

LED Power	10W
LED Type	COB
Lumen Output	1450 lm
Luminous Flux	1142 lm
Efficacy	97.61 lm/W
Colour Temperature	2700K 3000K 3500K 4000K
Colour Technology	CRI 90+ CRI 93+ VIVID CRI 97+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L80)
Beam Angle	Narrow Medium Wide

System Power	11.7W Typical
Driver Model	Trend 150218-300 (L&T)
Input	180-265V AC 50/60 Hz
Output	30-42V DC 300mA
Power Factor	>0.93
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Leading & Trailing Edge DALI 1-10V

General Characteristics

Category	Downlights
Family	Miniled
Surface	Ceiling
Mounting	Recessed
Insulation Contact	CA90
Ingress Protection	IP65



Scan to explore
XDF10 online

Miniled XDF10


10W IP65 Rated Recessed Downlight

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Driver
XDF10	2.7 (2700K)	(CRI 90+ Standard)	NB (Narrow)	W (White)	LT (Leading & Trailing Edge)
	3 (3000K)	V (CRI 93+ VIVID)	MB (Medium)	B (Black)	DALI (DALI)
	3.5 (3500K)	R (CRI 97+ Standard)	WB (Wide)	S (Silver)	110V (1-10V)
	4 (4000K)				

Order Code **XDF104-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDF10

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim