



Scan to explore
XDR10 online

Miniled XDRL10

10W IP65 Rated Recessed Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Driver |
|--------------|--------------------|----------------------|-------------|-------------|------------------------------|
| XDRL10 | 2.7 (2700K) | (CRI 90+ Standard) | NB (Narrow) | W (White) | LT (Leading & Trailing Edge) |
| | 3 (3000K) | V (CRI 93+ VIVID) | MB (Medium) | B (Black) | DALI (DALI) |
| | 3.5 (3500K) | R (CRI 97+ Standard) | WB (Wide) | S (Silver) | 110V (1-10V) |
| | 4 (4000K) | | | | |

Order Code **XDRL104-WB-W-LT**



Product Features

- Deep recessed LED downlight with IP65 rating, known for its thin trim profile and low glare design
- Manufactured with an aluminium body and powder coat finish
- CRI 90+ available in 2700K, 3000K, 3500K and 4000K CCT options; CRI 93+ VIVID and CRI 97+ available in 2700K, 3000K and 4000K CCT options
- Supplied with a remote driver

Product Attributes




To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDRL10

Physical Characteristics

| | |
|---------------|------------------------|
| Trim Colour | White Black Silver |
| Dimensions | Ø102 x 122 (H) mm |
| Spring Height | 50 mm |
| Cutout | Circular 92 mm |
| Weight | 245 g |

Dimensions (mm)

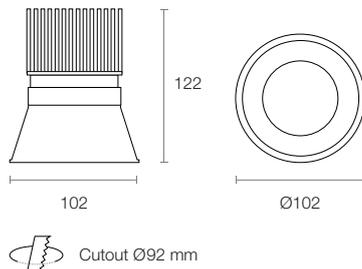

Technical Characteristics

Based on XDRL104-WB-W-LT

| | |
|--------------------|--|
| LED Power | 10W |
| LED Type | COB |
| Lumen Output | 1450 lm |
| Luminous Flux | 1036 lm |
| Efficacy | 88.55 lm/W |
| Colour Temperature | 2700K 3000K 3500K 4000K |
| Colour Technology | CRI 90+ CRI 93+ VIVID CRI 97+ |
| Colour Deviation | SDCM ≤ 3 |
| Lifetime | 50,000 hours (L80) |
| Beam Angle | Narrow Medium Wide |
| System Power | 11.7W Typical |
| Driver Model | Trend 150218-300 (L&T) |
| Input | 180-265V AC 50/60 Hz |
| Output | 30-42V DC 300mA |
| Power Factor | >0.93 |
| Protection | OVP, OTP, OCP, SCP, OPP |
| Dimming | Leading & Trailing Edge DALI 1-10V |

General Characteristics

| | |
|--------------------|------------|
| Category | Downlights |
| Family | Miniled |
| Surface | Ceiling |
| Mounting | Recessed |
| Insulation Contact | CA90 |
| Ingress Protection | IP65 |



Scan to explore
XDR10 online

Miniled XDR10

10W IP65 Rated Recessed Downlight

| Product Code | Colour Temperature | Colour Technology | Beam Angle | Trim Colour | Driver |
|--------------|--------------------|----------------------|-------------|-------------|------------------------------|
| XDR10 | 2.7 (2700K) | (CRI 90+ Standard) | NB (Narrow) | W (White) | LT (Leading & Trailing Edge) |
| | 3 (3000K) | V (CRI 93+ VIVID) | MB (Medium) | B (Black) | DALI (DALI) |
| | 3.5 (3500K) | R (CRI 97+ Standard) | WB (Wide) | S (Silver) | 110V (1-10V) |
| | 4 (4000K) | | | | |

Order Code **XDR104-WB-W-LT**

To configure this downlight, please visit
trendlighting.com.au/product/miniled-XDR10

Trim Colour



W
White Trim



B
Black Trim



S
Silver Trim