



Scan to explore  
ZPX15 online

# Panel ZPX15

15W IP65 Rated Recessed Rectangular Panel Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
ZPX15	4 (4000K)	(CRI 80+ Standard)	UW (Ultra Wide)	W (White)	PR (Plaster Recessing Kit) SM (Surface Mounting Kit) SP (Suspension Kit)	ND (Non-dimmable) DALI (DALI)

Order Code **ZPX154-UW-W-ND**

\* Optional accessories



## Product Features

- Rectangular LED panel light manufactured from powder coated extruded aluminium frame with low glare and high transparency micro-prism diffuser
- Designed with a sealed face to achieve an IP65 rating
- Can be configured with different mounting kits - suspended, surface mounted and plaster recessed
- Suitable for mounting in metric T-Bar ceiling applications
- CRI 80+ available in 4000K CCT option
- Supplied with a remote driver

## Product Attributes




To configure this panel, please visit  
[trendlighting.com.au/product/panel-ZPX15](http://trendlighting.com.au/product/panel-ZPX15)

## Physical Characteristics

Trim Colour	White
Dimensions (LxWxH)	595 x 295 x 10 mm
Weight	1250 g

## Dimensions (mm)



## Technical Characteristics

Based on ZPX154-UW-W-ND

LED Power	15W
LED Type	SMD
Lumen Output	2125 lm
Luminous Flux	1720 lm
Efficacy	86 lm/W
Colour Temperature	4000K
Colour Technology	CRI 80+
Colour Deviation	SDCM ≤ 3
Lifetime	50,000 hours (L70)
Beam Angle	Ultra Wide

System Power	20W Typical
Driver Model	Trend 150020-700 (Non-dim)
Input	180-265V AC 50/60 Hz
Output	30-40V DC 700mA
Power Factor	>0.90
Protection	OVP, OTP, OCP, SCP, OPP
Dimming	Non-dimmable   DALI

## General Characteristics

Category	Panels & Troffers
Family	Panel
Surface	Ceiling
Mounting	Recessed   Surface Mounted   Suspended
Insulation Contact	Non-IC
Ingress Protection	IP65



Scan to explore  
ZPX15 online

# Panel ZPX15

15W IP65 Rated Recessed Rectangular Panel Light

Product Code	Colour Temperature	Colour Technology	Beam Angle	Trim Colour	Accessories *	Driver
ZPX15	4 (4000K)	(CRI 80+ Standard)	UW (Ultra Wide)	W (White)	PR (Plaster Recessing Kit) SM (Surface Mounting Kit) SP (Suspension Kit)	ND (Non-dimmable) DALI (DALI)

Order Code **ZPX154-UW-W-ND**

\* Optional accessories

To configure this panel, please visit  
[trendlighting.com.au/product/panel-ZPX15](http://trendlighting.com.au/product/panel-ZPX15)

## Trim Colour



W  
**White Trim**


## Accessories \*



PR  
**Plaster Recessing Kit**



SM  
**Surface Mounting Kit**

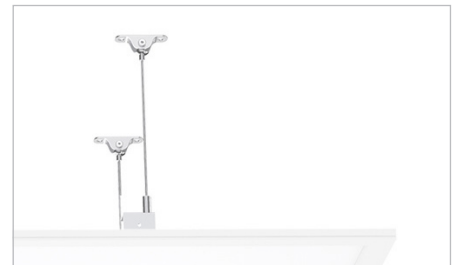

SP  
**Suspension Kit**